




Centine reticolari a 3 correnti

belloli



Caratteristiche:

- Peso contenuto → facili da montare
- Materiale: acciaio d'armatura B500B
- Tensione a snervamento (f_y) > 355 N/mm²
- Tensione a rottura (f_u) > 500 N/mm²

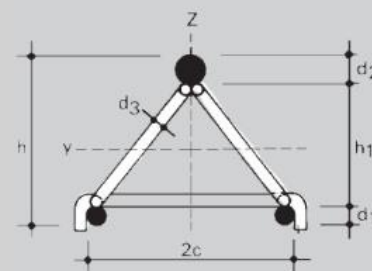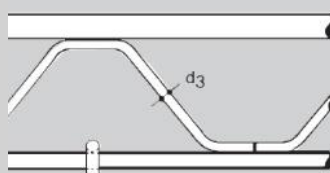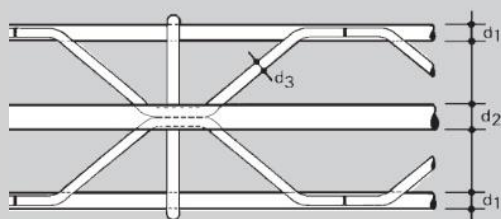

Tipo	Valori statici						Dimensione dei profili					
	Peso [kg/m]	A _s [mm ²]	I _y [mm ⁴ x 10 ⁶]	W _y [mm ³ x 10 ³]	I _z [mm ⁴ x 10 ⁶]	W _z [mm ³ x 10 ³]	d ₁ [mm]	d ₂ [mm]	d ₃ [mm]	h [mm]	2c [mm]	h ₁ [mm]
3G-70/18/26	10.3	1041	2.235	38.48	1.576	24.61	18	26	10	114	128	70
3G-70/20/26	11.4	1159	2.527	39.85	1.938	29.81	20	26	10	116	130	70
3G-70/20/30	12.5	1335	3.057	50.69	1.955	30.08	20	30	10	120	130	70
3G-70/22/34	15.1	1668	4.062	65.88	2.388	36.17	22	34	10	126	132	70
3G-70/26/34	17.4	1970	5.005	70.58	3.323	48.86	26	34	10	130	136	70
3G-70/30/40	23.1	2674	7.551	99.98	4.483	64.04	30	40	10	140	140	70
3G-100/18/26	10.9	1041	3.905	53.66	2.902	34.54	18	26	10	144	168	100
3G-100/20/26	11.9	1159	4.391	55.13	3.571	42.00	20	26	10	146	170	100
3G-100/20/30	13.4	1335	5.252	68.92	3.588	42.21	20	30	10	150	170	100
3G-100/22/34	15.6	1668	6.867	85.11	4.364	50.73	22	34	10	156	172	100
3G-100/26/34	18.5	1970	8.383	96.26	6.084	69.13	26	34	10	160	176	100
3G-100/30/40	23.8	2674	12.343	135.12	8.159	90.65	30	40	10	170	180	100
3G-115/18/26	12.0	1041	4.915	61.35	4.636	44.57	18	26	12	159	208	115
3G-115/20/26	13.0	1159	5.518	62.86	5.706	54.34	20	26	12	161	210	115
3G-115/20/30	14.5	1335	6.574	78.13	5.723	54.50	20	30	12	165	210	115
3G-115/22/34	16.7	1668	8.549	96.22	6.948	65.54	22	34	12	171	212	115
3G-115/26/34	19.6	1970	10.401	109.30	9.695	89.76	26	34	12	175	216	115
3G-115/30/40	24.9	2674	15.192	153.01	12.96	117.88	30	40	12	185	220	115
3G-130/18/26	13.1	1041	6.043	69.09	4.636	44.57	18	26	12	174	208	130
3G-130/20/26	14.1	1159	6.773	70.62	5.706	54.34	20	26	12	176	210	130
3G-130/20/30	15.6	1335	8.046	87.37	5.723	54.50	20	30	12	180	210	130
3G-130/22/34	17.8	1668	10.417	107.37	6.948	65.54	22	34	12	186	212	130
3G-130/26/34	20.7	1970	12.641	122.43	9.695	89.76	26	34	12	190	216	130
3G-130/30/40	26.0	2674	18.345	171.04	12.967	117.88	30	40	12	200	220	130

Altre dimensioni disponibili su richiesta